

# iSign - A500 / A500WL

Network Digital Signage Player




## Software Features

- ◆ Multi zone layout supports full spectrum of media formats
- ◆ Flexible schedule management showing customized contents in different time period
- ◆ Network management function to support remote content update
- ◆ The drag and drop interface enables you to assign zones within one display layout in seconds

## Hardware Specifications

◆ Video Input	Composite Video with RCA connector
◆ Audio Input	Stereo audio with RCA connector
◆ Video Output	DVI / Analog VGA (RGBHV or YPbPr) S-Video / Composite Video
◆ Audio Output	Stereo audio with RCA connector
◆ Network	iSign A500 : 10/100Mbps iSign A500WL : 10/100Mbps and 802.11b/g wireless
◆ USB	2 x USB 2.0
◆ Serial Port	2 x RS-232 (1 on front panel, 1 on I/O panel)
◆ Storage	1 x CompactFlash socket for type II 1 x internal 2.5" IDE HDD
◆ Power input	12VDC
◆ Power Consumption	8W
◆ Chassis Construction	ABS + PC Plastic (front panel) Heavy duty steel
◆ Operating Temperature	0°C ~50°C
◆ Operating Shock	3G acceleration peak to peak (11ms)
◆ Operating Vibration	MIL-STD-810F 514.5C-1
◆ Weight (Net/ Gross)	1.2Kg / 2.4Kg
◆ Dimensions (DxWxH)	187.2 mm x 133.7 mm x 46 mm

## Dimensions (unit : mm)

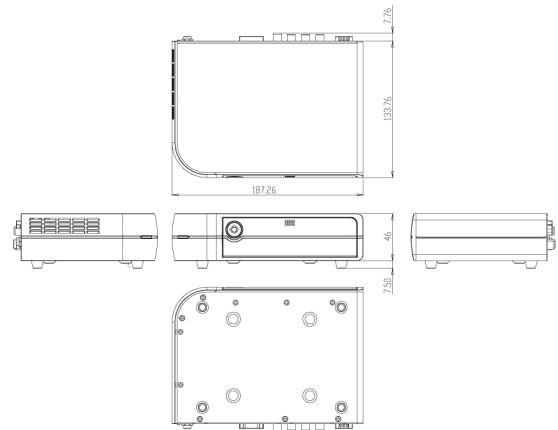

## Packing List

1 x QIG
1 x power adaptor
1 x power cord
2 x wall mount bracket
1 x iSign AdExpress & AdDesign software CD
1 x AV cable
1 x IDE cable
2 x key
1 x screw set
1 x 1GB CompactFlash card

## Ordering Information

Part No.	Description
ISIGN - A500 - R10	Network Digital Signage Player, 10/100Mbps Ethernet, 2 x USB 2.0, USB,VGA/S-video/DVI/component output,Silver & Black color,RoHS
ISIGN - A500WL - R10	Wireless Network Digital Signage Player, 802.11b/g wireless, 10/100Mbps Ethernet, 2 x USB 2.0, USB,VGA/S-video/DVI/component output,Silver & Black color,RoHS
32000-038101-RS	VGA to Component video cable